

## [2018] Oracle 1Z0-160 Dumps with Valid 1Z0-160 Exam Questions PDF

The Oracle 1Z0-160 Oracle Database Cloud Service Exam exam is an ultimate source for professionals to retain their credentials dynamic. And to make your work easier, **TestsChamp** offers you the valid dumps, designed and verified by the Oracle experts. **Click here for more info:** <https://www.testschamp.com/1Z0-160.html>

[Oracle 1Z0-160 Exam Questions and Answers \(PDF\)](#)

**MONEY BACK GUARANTEE**

A SHORTEST WAY TO SUCCESS

# Get Real Exam Questions

100% Pass Guarantee In Real Exam

## GET 20% DISCOUNT

**COUPON CODE: TC2018**

**CLICK HERE**

FREE DEMO

INSTANT DOWNLOAD

LIVE SUPPORT

90 DAYS FREE UPDTAE

**TestsChamp**

## Version: 10.0

---

### Question: 1

---

You want all your colleagues to be able to access the compute node associated with an Oracle Database Cloud – Database Deployment instance. You want them to do so by using a custom host name rather than an IP address regardless of the client machine (personal or provided by the company) that they use for the access.

How would you enable this access?

- A. Configure the Advanced Security Option (ASO).
- B. Enable secure access to the Database Deployment compute node and database instance from remote hosts by using SSH.
- C. Contact the administrator of your company's intranet DNS and request a custom DNS record for the compute node's public IP address.
- D. Edit the machine's /etc/hosts file.
- E. Resolve your domain name to the IP address of the Database Deployment compute node by using the third-party domain registration vendor console.

---

**Answer: C**

---

Explanation:

You can associate a custom host name or domain name to the public IP address of a compute node associated with your Oracle Database Cloud Service environment.

To associate a custom host name to the public IP address of a compute node, contact the administrator of your DNS (Domain Name Service) and request a custom DNS record for the compute node's public IP address. For example, if your domain is example.com and you wanted to use clouddb1 as the custom host name for a compute node, you would request a DNS record that associates clouddb1.example.com to your compute node's public IP address.

References: <https://docs.oracle.com/en/cloud/paas/database-dbaas-cloud/csdbi/define-custom-host-or-domain-name.html>

---

### Question: 2

---

With Oracle Database Cloud Service as the subscription type, you must configure a database for Backup and Recovery.

Which two options do you have to back up your database instance?

- A. No backups required. You are responsible for configuring the database backups.
- B. Backup to cloud storage and VM block storage. Ten days worth of backups are kept, with five most recent days worth of backups available directly on VM block storage.
- C. Backup to Oracle Cloud Service storage volumes that is equal to five times the value that was provided in Usable Data Storage when the instance was created.



D. Backup to cloud storage and VM block storage. Fourteen days worth of backups are kept, with seven most recent days worth of backups available directly on VM block storage.

---

**Answer: A,C**

---

Explanation:

When creating a new database deployment on Oracle Database Cloud Service, you choose whether you want automatic backups to be configured for the database. Your choices are:

Both Cloud Storage and Local Storage—30 days' worth of backups are kept, with the 7 most recent days' worth available directly on the compute node's local storage.

Cloud Storage Only—30 days' worth of backups are kept, with all backups on cloud storage.

None—automatic backups are not configured.

References: <https://docs.oracle.com/en/cloud/paas/database-dbaas-cloud/csdbi/db-deployments.html>

---

### Question: 3

---

Users must be granted roles to manage Cloud services.

Which three statements are true about roles and role assignment in Oracle Database Cloud Service?

- A. Service administrators can assign and remove roles only for users of the services that they manage.
- B. The DBaaS Database Administrator role permits granting the DBaaS Database Administrator or DBaaS Database Operator role to existing users.
- C. Identity domain administrators can assign and remove roles for users in any identity domains.
- D. The DBaaS Database Operator role permits the ability to scale, patch, and backup or restore service instances.
- E. DBaaS network administrators can grant access privileges to designated users.

---

**Answer: A,D,E**

---

Explanation:

A: A Service administrator manages administrative functions related to Oracle Cloud services within an identity domain.

D: The privileges given to the DBaaS Database Administrator role include:

Can scale, patch, and back up or restore database deployments

---

### Question: 4

---

Which users are created and can be used for database and host management of your DBaaS database servers?

- A. root, opc and oracle users
- B. root, oracle and cloud users
- C. root and oracle users
- D. opc and oracle users
- E. cloud and oracle users

**Explanation:**

Linux user accounts that are provisioned on an Oracle Database Cloud Service deployment that hosts an Oracle Real Application Clusters (Oracle RAC) database:

\* opc

The system administrator account you use to connect to the compute node using SSH. This user can use the sudo command to perform operations that require root-user access.

\* oracle

The Oracle Database administrator account you use to access the system and perform non-root database administration tasks.

\* grid

The Oracle Grid Infrastructure administrator account you use to perform ASM, ACFS, and clusterware administration tasks.

\* root

The root administrator for the system. You do not have direct access to this account. To perform operations that require root-user access, use the sudo command as the opc user.

References: <https://docs.oracle.com/en/cloud/paas/database-dbaas-cloud/csdbi/linux-user-accounts-rac.html>

---

**Question: 5**

---

Which two situations require that your Database Deployment be scaled up?

- A. The Database Deployment instance is maxed out on semaphore sets.
- B. The database instance has reached the limit in the license\_max\_sessions database parameter.
- C. The Database Deployment is maxed out on CPU.
- D. The database instance is out of space in the sysaux and system tablespaces.
- E. The Database Deployment is maxed out on storage.
- F. The Database Deployment is maxed out on semaphores.

---

**Answer: C,E**

---

**Explanation:**

Existing DBCS instances may scale up to bigger shapes in OCPU, Memory and Storage for vertical scaling. For horizontal scaling, DBCS provides RAC with the Extreme Performance option currently allowing applications to scale up to 2 nodes, each with a max of 16 OCPU shapes.

Note: An Oracle CPU (OCPU) provides CPU capacity equivalent of one physical core of an Intel Xeon processor with hyper threading enabled. Each OCPU corresponds to two hardware execution threads, known as vCPUs.

References: <https://cloud.oracle.com/opc/database/faq>

---

**Question: 6**

---

How would you enable a port persistently to keep communication always open through that port?

- A. To enable a port persistently, you must contact your DBaaS support team to update the port specifications for use.
- B. You can use server certificates to map a server's identity to enable persistent connection through a port to DBaaS instances.
- C. All ports that are available in DBaaS servers must use an SSH tunnel and cannot be enabled persistently.
- D. To enable a port persistently, you would require access to the Compute Cloud Service Console to open the ports to a set of IP addresses.

---

**Answer: A**

---

---

**Question: 7**

---

dbaascli is a command-line interface for managing a database instance on cloud.  
Which two functions can you manage with dbaascli?

- A. running health checks on your database
- B. creating users in the database instance
- C. restoring from the most recent backup
- D. creating a database instance
- E. applying a patch

---

**Answer: C,E**

---

Explanation:

The dbaascli utility is provided on Oracle Database Cloud Service deployments to perform a variety of life-cycle and administration operations.

Using the dbaascli utility, you can perform operations like:

- \* Database recovery

The orec latest subcommand restores the most recent backup and performs complete recovery.

- \* Patching the database deployment

The dbpatchm apply subcommand applies the patch.

- \* Changing the password of the SYS user

- \* Checking the status of the Oracle Data Guard configuration

- \* Switchover and failover in an Oracle Data Guard configuration

- \* Rotating the master encryption key

References: <https://docs.oracle.com/en/cloud/paas/database-dbaas-cloud/csdbi/dbaascli.html>

---

**Question: 8**

---

Which statement is true about the Database Deployment and Database instances in Oracle Public Cloud?

- A. An Oracle database instance can support only one Database Deployment.
- B. A Database Deployment can support only one Oracle database instance.
- C. An Oracle database instance can support multiple Database Deployment.
- D. A Database Deployment runs in a pluggable database (PDB), which is contained in a multi-tenant



container database (CDB).

E. A Database Deployment can support multiple Oracle database instances.

---

**Answer: E**

---

Explanation:

References:

[http://www.oracle.com/webfolder/technetwork/tutorials/obe/cloud/sscs/ProvisionDB/SOACS\\_prereq%20\\_DBCS.html](http://www.oracle.com/webfolder/technetwork/tutorials/obe/cloud/sscs/ProvisionDB/SOACS_prereq%20_DBCS.html)

---

### **Question: 9**

---

Which two statements are true about the information that you see on the Database Cloud Service page?

- A. It shows the date the instance was last accessed.
- B. It shows the number of active sessions for each instance in your domain.
- C. It shows the total memory for all instances in your domain.
- D. It lists the memory for each instance in your domain.
- E. It shows the name of each database instance.

---

**Answer: C,E**

---

Explanation:


The Oracle Database Cloud Service Services page displays all deployments on Oracle Database Cloud Service.

Use the Oracle Database Cloud Service Services page to perform the following tasks:

Deleting a Database Deployment

The Activity page displays activities for all Oracle Database Cloud Service deployments in your identity domain.

Example:

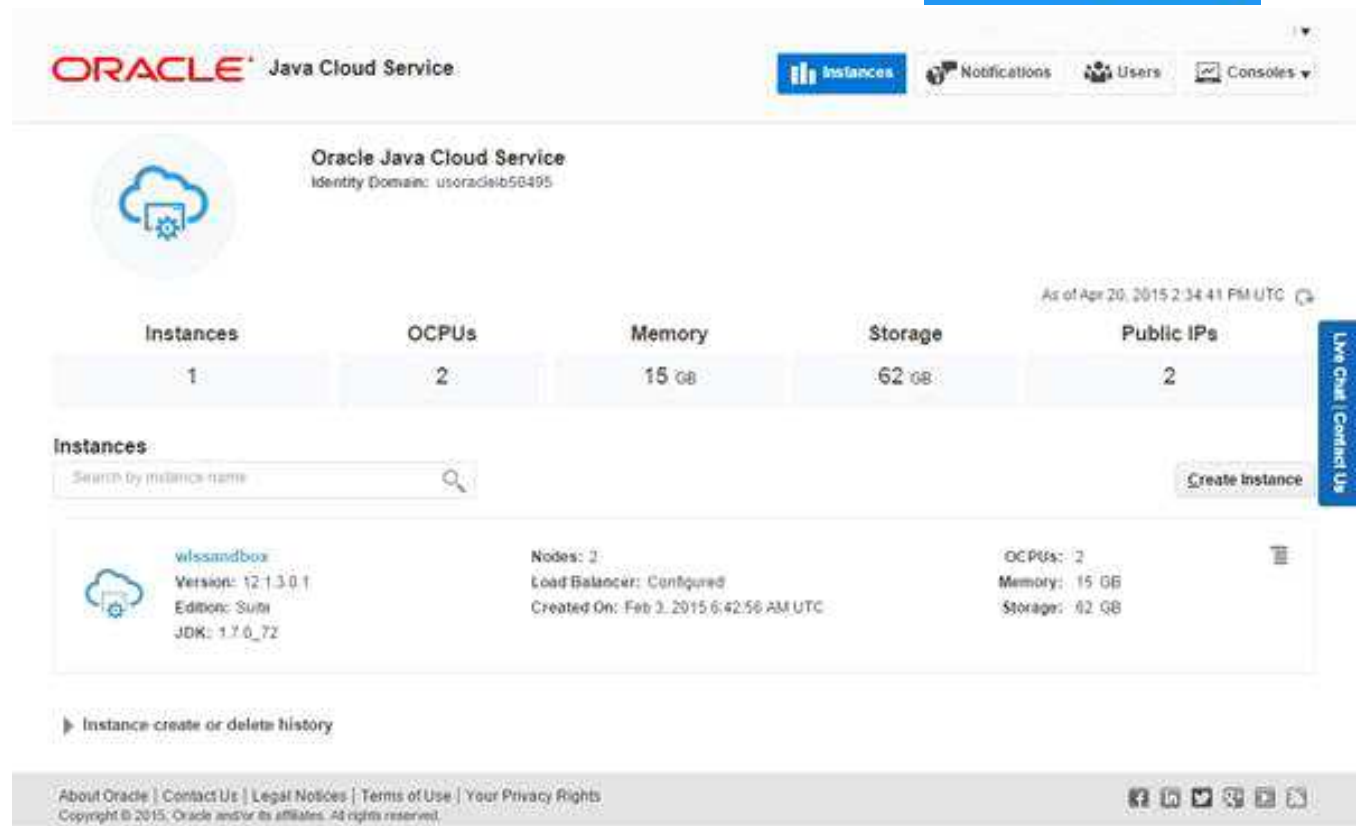

The screenshot displays the Oracle Java Cloud Service console. At the top, the Oracle logo and 'Java Cloud Service' are visible. Navigation links for 'Instances', 'Notifications', 'Users', and 'Consoles' are present. The main dashboard shows a summary for the 'wls-sandbox' instance: 1 Instance, 2 OCPUs, 15 GB Memory, 62 GB Storage, and 2 Public IPs. Below this, a table lists the instance details:

Instances	OCPUs	Memory	Storage	Public IPs
1	2	15 GB	62 GB	2

The 'Instances' section includes a search bar and a 'Create Instance' button. The instance details for 'wls-sandbox' are as follows:

- Instance Name:** wls-sandbox
- Version:** 12.1.3.0.1
- Edition:** Suite
- JDK:** 1.7.0\_72
- Nodes:** 2
- Load Balancer:** Configured
- Created On:** Feb 3, 2015 6:42:58 AM UTC
- OCPUs:** 2
- Memory:** 15 GB
- Storage:** 62 GB

At the bottom, there is a link to 'Instance create or delete history' and a footer with 'About Oracle | Contact Us | Legal Notices | Terms of Use | Your Privacy Rights' and 'Copyright © 2015, Oracle and/or its affiliates. All rights reserved.'

## References:

[http://www.oracle.com/webfolder/technetwork/tutorials/obe/cloud/sscs/ProvisionDB/SOACS\\_prereq%20\\_DBCS.html](http://www.oracle.com/webfolder/technetwork/tutorials/obe/cloud/sscs/ProvisionDB/SOACS_prereq%20_DBCS.html)

<https://docs.oracle.com/en/cloud/paas/database-dbaas-cloud/csdbi/service-console-services-page.html>

## Question: 10

Which statement is true about the Oracle software releases that are currently supported in a Database as a Service (DBaaS) instance in Oracle Public Cloud?

- A. All versions and releases of Oracle Database 12c are supported.
- B. All versions and releases of Oracle Database 11g are supported.
- C. Oracle Database 11g Release 2 is supported.
- D. Oracle Database 12c is supported but only for single container databases.

**Answer: C**

## Explanation:

11g Release 2 and 12c Release 1 (and 2) are supported.

How To Pass Oracle 1Z0-160 Exam?

<https://www.testschamp.com/1Z0-160.html>

TestsChamp

ORACLE Database Cloud Service

Create Database Cloud Service Instance

Previous Cancel

Subscription Release Edition Details Confirmation

Next

Software Release

Select the database release version for this Oracle Database Cloud Service instance.

Oracle Database 11g Release 2  
Oracle Database Version 11.2.0.4  
on Oracle Linux 6.4

Oracle Database 12c Release 1  
Oracle Database Version 12.1.0.2  
on Oracle Linux 6.4

References:

[http://www.oracle.com/webfolder/technetwork/tutorials/obe/cloud/dbaas/obe\\_dbaas\\_creating\\_an\\_instance/obe\\_dbaas\\_creating\\_an\\_instance.html](http://www.oracle.com/webfolder/technetwork/tutorials/obe/cloud/dbaas/obe_dbaas_creating_an_instance/obe_dbaas_creating_an_instance.html)



## Thank You For Trying 1Z0-160 PDF Demo

To try our 1Z0-160 practice exam software visit link below

<http://www.testschamp.com/1Z0-160.html>

## Start Your 1Z0-160 Preparation

Use Coupon “**20OFF**” for extra 20% discount on the purchase of Practice Test Software. Test your 1Z0-160 preparation with actual exam questions.